



INSTRUCTIONS FOR INSTALLATION OF PUMP / FILTER PLATFORM BASE (S200PAK3)

The molded platform base is pre-drilled and threaded to accept SP-2600 and SP-3000 series Super Pumps and SP-2800 series Max-Flo Pumps.

ASSEMBLY INSTRUCTIONS

1. Place filter, with control valve installed, on base. (Base should be placed on level, well packed ground or concrete slab.)
2. Screw the short, "ball" end of union, with union nut, into the opening in control valve marked PUMP. Use Teflon tape sealant (3-4 wraps on threads) and screw in as far as possible, hand tight, then one additional turn with a wrench.
3. Thread compression fitting, with appropriate pipe sealant, into pump discharge outlet. Place locknut and seal gasket on pipe end of sweep elbow and secure to compression coupling. Adjust height of elbow according to location of union ball.
4. Pump attachment. Align holes in pump mounting legs with appropriate holes in base and secure with screws and washers.
5. **Install the Union O-ring.**
6. Adjust filter on base so that ball and socket of union ends contact. Join system by hand tightening molded union nut. Do not force if union nut is difficult to tighten, simply move filter slightly to align correctly. Then tighten union nut securely.

NOTE: To prevent breakage and damage to pump and control valve, use only pipe sealants specifically formulated for plastics. Do not overtighten fittings or adapters

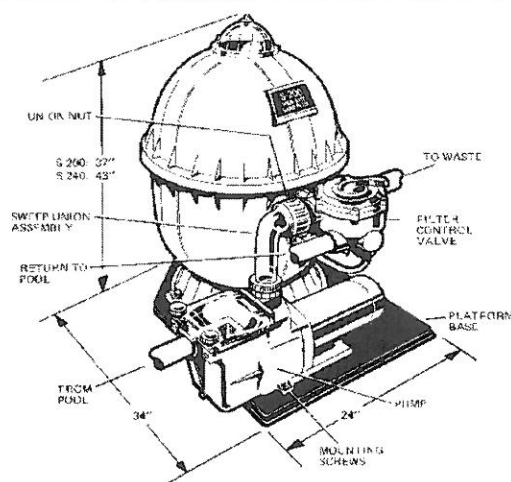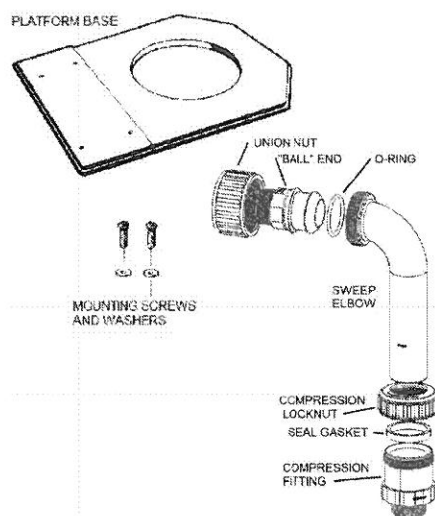

Hayward Pool Products
620 Division Street, Elizabeth, NJ 07207
Phone: (908) 351.5400
www.hayward.com