


## How it Works


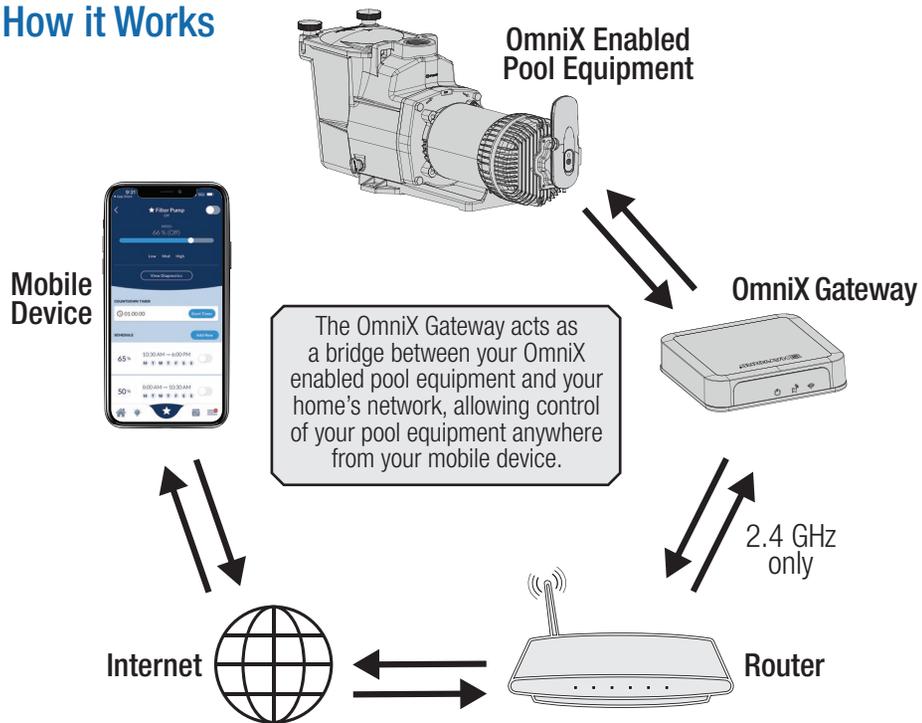


## Before you Begin

### Download the OmniX Mobile App

In the OmniX app:

- Log in to an existing Hayward account or create a new account.
- Create a new "site" or identify the existing "site" you wish to control.

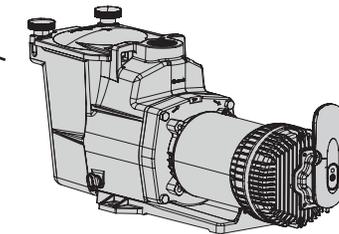
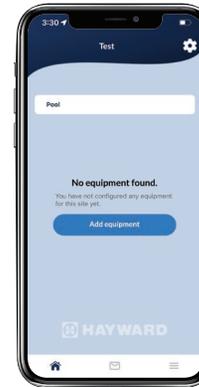


## Getting Started

### WHERE TO LOCATE GATEWAY

- Inside of the home
- As close to the OmniX pool equipment as reasonable
- Within range of the home network access point (typically a router)

**IMPORTANT - The OmniX Gateway cannot be used with a mobile hotspot. Connect to your home network using a wired or 2.4 GHz wireless connection only.**

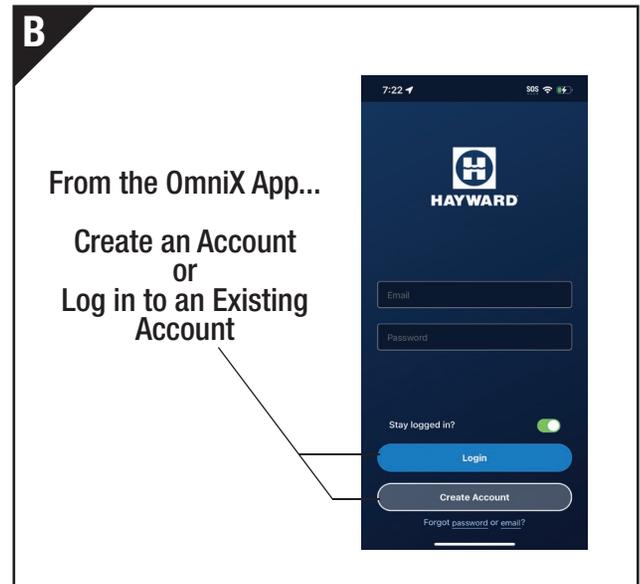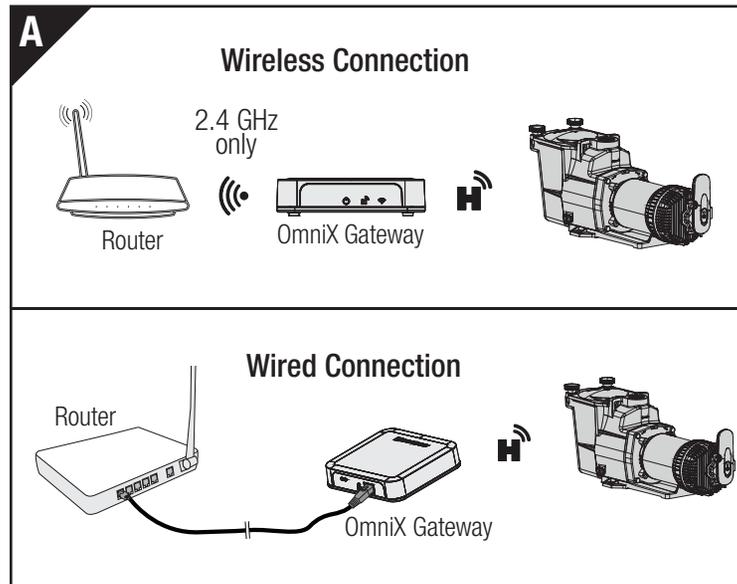

## Getting Started - continued


**C** To add the Gateway as well as other OmniX compatible equipment, follow the instructions in the app.

## Resetting the Gateway

- If you relocate the OmniX Gateway to another site, you'll need to reset the Gateway to the original factory settings and then repeat "Getting Started".
- Resetting the OmniX Gateway will force the unit to "forget" all previously configured equipment and connections.
- **To Reset:** Hold the CONNECT button on the rear of the Gateway for 6 seconds. The blue LED will begin to blink quickly. Next, press the CONNECT button 3 times to initiate the reset.
- The yellow and blue LEDs will blink slowly upon successful reset.



## OmniX Gateway Quick Start Guide




Scan to download OmniX app required for Gateway configuration

## Troubleshooting

- 1. The Power LED is not lit**
  - Verify that there is power to the Gateway.
- 2. Gateway will not connect to app during configuration**
  - Move the mobile device closer to the Gateway.
  - Make sure that the mobile device's Bluetooth is turned on.
  - Make sure that the app has permission to use Bluetooth (this can usually be found in the mobile device's settings).
  - Reset the Gateway (see above).
- 3. OmniX equipment is shown as not connected**
  - Ensure that the other OmniX devices are powered.
  - Ensure that all OmniX devices are configured to the same site.
  - Relocate the Hayward Gateway to an indoor location closer to the OmniX equipment.

For further information or technical support, visit our website at [www.hayward.com](http://www.hayward.com).

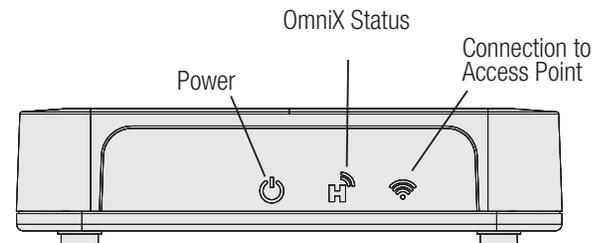

LED	Color	LED State	Indication	Note
Wi-Fi	Yellow	Blinking - Fast	Error State	
		Blinking - Medium	Network/Wifi not connected	
		Blinking - Slow	Network not configured	Check router status
		Solid	Internet connected	Normal operation
OmniX	Blue	Blinking -Fast	Error State	Reset the Gateway
		Blinking - Medium	Waiting to be claimed	
		Blinking - Slow	Gateway not configured	
		Solid	Normal operation	Normal operation
Power	Green	Solid	Gateway powered	Normal operation

Hayward Industries  
 1415 Vantage Park Dr., Suite 400  
 Charlotte, NC 28203  
 Phone (908)-355-7995  
[www.hayward.com](http://www.hayward.com)